

Specifications BuzziSkin

Composition 100% Recycled P.E.T. Felt, selfadhesive backing
Weight 1.000 g/m² | 29.49 oz/yd²
Width 98 cm | 38.58”
Thickness 6,1 mm | 0.24”
Abrasion resistance >7.000 Martindale
Flammability EU: EN 13501.1:2013 Class C-s2,d0
USA: ASTM E84 Class A certified
Fastness to light EU: 6-7 | USA 5
⚠ Application & Installation Restrictions see installation manual



Specifications BuzziFelt

Composition 100% Recycled P.E.T. Felt, latex backing
Weight 1.000 g/m² | 29.49 oz/yd²
Width 170 cm | 66.93”
Thickness 6 mm | 0.236”
Abrasion resistance >7.000 Martindale
Flammability EU: EN 13501.1 + A1/2009 Class B-s1,d0
USA: ASTM E84 Class A certified
Fastness to light EU: 6-7 | USA 5



Maintenance BuzziSkin

Vacuum clean regularly. Don’t wash. Don’t remove the BuzziSkin from the product. Treat spillages immediately. Professional dry clean or wipe clean with a pH neutral soap and a damp cloth.




Maintenance BuzziFelt

Vacuum clean regularly. Don’t wash. Don’t remove the BuzziFelt from the product. Treat spillages immediately. Professional dry clean or wipe clean with a pH neutral soap and a damp cloth.




BuzziSkin


BuzziFelt




SK-Anthracyte 68




SK-Jeans 75



SK-StoneGrey 67



SK-LightBlue 60




SK-EcoBrown 58



SK-Mokka 74



SK-OffWhite 63



SK-Curry 61



SK-Red 59




SK-Orange 66




SK-Pink 65




SK-Lime 64



FE-LightBlue 60




FE-StoneGrey 67




FE-Jeans 75



FE-Anthracyte 68




FE-Curry 61



FE-OffWhite 63



FE-Mokka 74



FE-EcoBrown 58



FE-Lime 64



FE-Pink 65




FE-Orange 66



FE-Red 59

Front

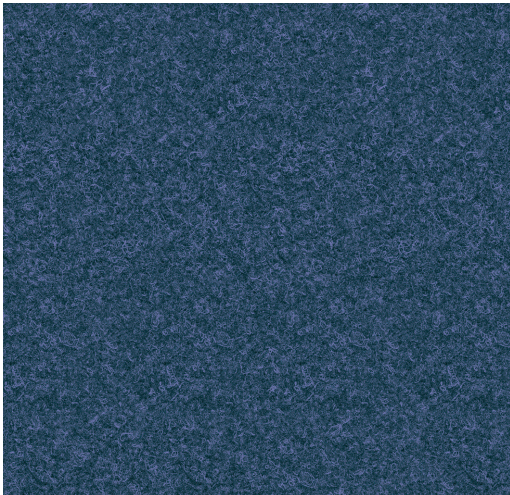

SK-Jeans 75

Back



Front



FE-Mokka 74

Back



